


Model shown 09.3004.1

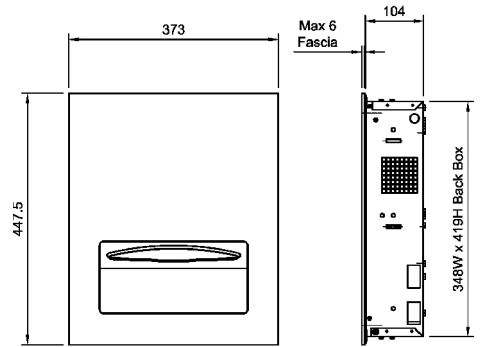

09.3004.1x

DOLPHIN PAPER TOWEL DISPENSER

- > Recessed, satin stainless steel finish paper towel dispenser. Holds 200 'C' fold or 300 interleave paper towels
- > Usage: Medium Traffic Areas
- > Glass finish
- > Available with glass, acrylic or corian fascias

WIDTH	373 MM
HEIGHT	447.5 MM
PROJECTION	6 MM

SPECIFICATION

Recess mounted glass faced paper towel dispenser. Model number 09.3004.1x.xx with right hand hinged glass door; vertically brushed satin stainless steel towel chute and stainless steel back box. Manufactured by Dolphin Solutions Ltd.

N.B. For surface mounted version order 09.3404.1x.xx

PRODUCT CODES

- | | |
|---------------------------|-----------|
| > Stainless steel | 09.3004 |
| > Coloured glass | 09.3004.1 |
| > Coloured acrylic | 09.3004.2 |
| > Coloured corian | 09.3004.3 |
| > Surface mounted version | 09.3404 |



09.3004



09.3004.2



09.3004.3

MATERIAL

- › Door Fascia: 6mm toughened glass to BS EN 12600 (Glass any colour/image of your choice) and stainless steel backed
- › Towel chute: 0.7mm satin finish stainless steel grade 1.4301 (304) to BS EN 10088-1
- › Back box: 0.9mm stainless steel grade 1.4301 (304) to BS EN 10088-1

CAPACITY

Paper Towels:	'C' Fold	Interleave
Length mm (min-max)	225-250	215-250
Width mm (min-max)	90-100	80-100
Quantity	200	300


OPERATION

- › Paper towel dispenser holds and dispenses 200 'C' fold or 300 interleave paper towels. Hinged door panel with hidden catch, which opens for refilling.

INSTALLATION

Flush mounting: Installation scrap section view for illustrative installation purposes.

- › For Flush mounting allow a minimum of 3mm all round (on overall unit dimensions for door clearance)
 - › Some relieving of board and/or stud work may be required to finish door flush with surrounding panels. Alternatively pack surrounding panels to finish flush with door panel.
-
- › Recommended wall opening of 360w x 431h x 114d
 - Recommended mounting height from underside of unit to FFL 1245mm (Male Toilet)
 - Open door by placing suction cup (supplied) on left hand side of door face and pulling open
 - Position the unit into the prepared wall recess allowing 6mm clearance all round for packing and adjustment
 - Fit temporary screws into the rectangular slots on the unit's sides (Do not over tighten, to allow for horizontal adjustment)
 - Fix casing to studwork using suitable screws (Fixing holes Ø6.5mm) and remove temporary screws from slots
 - Close door

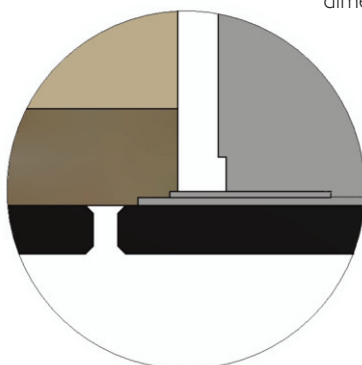

CARE AND MAINTENANCE

- › Clean with soap and warm water; dry with a clean soft cloth.
- › To maintain finish of stainless steel parts use any industrial steel cleaner; polishing along the material grain with a clean soft cloth.
- › Never Use Corrosives - such as bleach or other cleaning products containing hypochlorite;
- › Any form of acid solution or industrial cleaning solution; Bathroom cleaning products, developer liquids, concentrated disinfectants, strong alkalis or caustic soda;
- › Never Use Abrasives - such as wire wool; scouring pads;
- › Caution - Never use dirty or grit contaminated cleaning sponges or cloths

WARRANTY

This product is covered by a 12-month warranty from the date of purchase to be free from defects if installed and maintained in accordance with these instructions. Dolphin Solutions will replace or repair (as appropriate) free of charge any product with a proven manufacturing defect if reported within the warranty period.

Dolphin Solutions Ltd reserves the right to amend the design or dimensions without formal notice.

PRODUCT CODES EXPLAINED

Product Classification : 09.xxxx.xx.xx

Paper Towel Dispenser/Waste Bin

Product Model : xx.3004.xx.xx

Recessed Paper Towel Dispenser

Product Classification : xx.xxxx.1x.xx

Glass

Product Classification : xx.xxxx.xx.XX

XX